


INSUL - SUPPORT®

(Molded Fiberglass Support System)

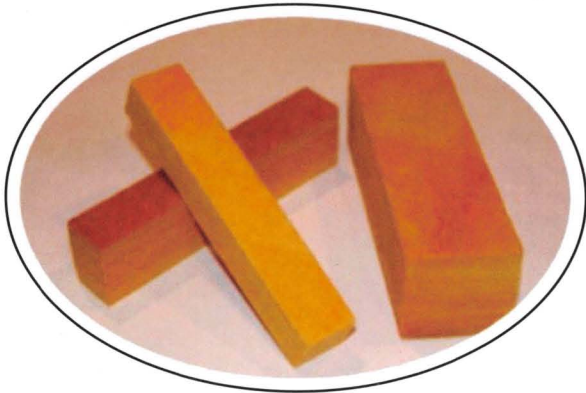

Insul-Support® Description

- It is superb for Insulation piping systems.
- Insul-Support is a molded 20-PCF density block.
- An excellent insert product to prevent compression at piping hangers.
- The Insul-Support block lengths are 6" , 9" , 12" & 14"
Widths are 1" , 1.5" , 2" , 2.5" , & 3"


Guide to Installation

- 1) Insul-Support is very easy to handle and simple to install .
- 2) Molded Insul-Supports should be the same thickness as the fiberglass Insulation.
- 3) Remove the necessary Fiberglass insulation equal to the Insul-Support, install the molded fiberglass in that location.

**Proudly Made in
North America**

Physical Property	Value / Unit
Service Temperature	Up to 450 F
Thermal Conductivity	C Value .84 ASTMC 518-76 (stable and non deteriorating)
Mold Growth	None UL 181 pH9
Moisture Absorption By Volume	less than 1% by volume
Density	20 Lbs./ Cu. Ft.
Corrosion	Does not corrode or cause corrosion
Safety	Non – Combustible
Shrinkage	None. Dimensionally stable
Alkalinity	pH9
ASTM E84 25/50	Less than 25 Flame Spread Index Less than 50 Smoke Development

See the following diagram for the recommended placement of the Fiberglass Insul-Support on various size piping.

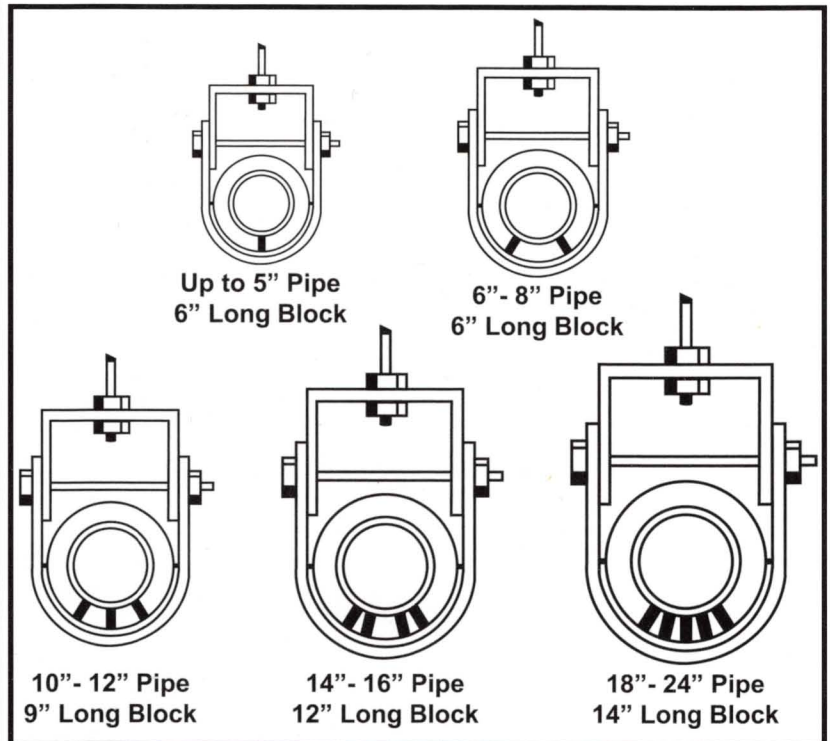

SHOP INSULATION, L.L.C.

www.shopinsulation.com